


CR1V PB01 SERIES

Current Sensor

Model Number:

CR1V 6 PB01
 CR1V 15 PB01
 CR1V 25 PB01

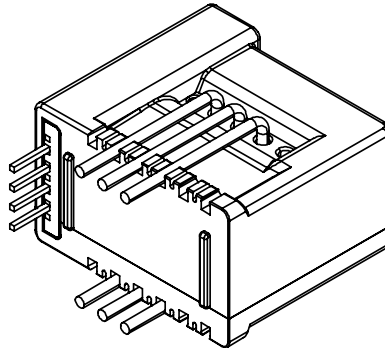

For the electronic measurement of current:DC,AC,pulsed...,with galvanic separation between the primary and the secondary circuit.

Features

- ✧ Closed loop (compensated) current sensor using the Hall effect
- ✧ Galvanic separation between primary and secondary
- ✧ Insulating plastic case recognized according to UL 94-V0
- ✧ Very good linearity
- ✧ High accuracy
- ✧ Very low offset drift over temperature
- ✧ No insertion losses
- ✧ Standards:
 - IEC 60664-1:2020
 - IEC 61800-5-1:2022
 - IEC 62109-1:2010

Applications

- ✧ AC variable speed and servo motor drives
- ✧ Uninterruptible Power Supply (UPS)
- ✧ Static converters for DC motor drives
- ✧ Switch Mode Power Supplies (SMPS)
- ✧ Power supply for welding applications
- ✧ Battery Management
- ✧ Photovoltaic inverter
- ✧ Module power supply

Safety

The sensor must be used according to IEC 61800-5-1.

The sensor must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the following manufacture's operating instructions.

Caution, risk of electrical shock !



When operating the sensor, certain parts of the module can carry hazardous voltage (e.g., Primary busbar, power supply). Ignore this warning can lead to injury and/or cause serious damage.

This sensor is a built-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

CR1V PB01 SERIES

Absolute maximum ratings (not operating)

Parameter	Symbol	Unit	Value
Supply voltage	V_C	V	6
Primary conductor temperature	T_B	°C	110
ESD rating, Human Body Model (HBM)	V_{ESD}	kV	4

- ※ Stresses above these ratings may cause permanent damage.
- ※ Exposure to absolute maximum ratings for extended periods may degrade reliability.

Environmental and mechanical characteristics

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	T_A	°C	-40		105	
Ambient storage temperature	T_S	°C	-55		125	
Mass	m	g		10		

Insulation coordination

Parameter	Symbol	Unit	Value	Comment
Rms voltage for AC insulation test @ 50Hz,1min	V_d	kV	4.1	According to IEC 60664-1
Impulse withstand voltage 1.2/50 μ s	V_w	kV	7.5	According to IEC 60664-1
Clearance (Pri.-sec.)	d_{cl}	mm	7.5	
Creepage distance (Pri.-sec.)	d_{cp}	mm	7.5	
Plastic case	-	-	UL94-V0	
Comparative tracking index	CTI	PLC	1	
Application example	-	-	300V CAT III PD2	Reinforced insulation, according to IEC 61800-5-1, IEC62109-1CATIII, PD2
Application example	-	-	600V CAT III PD2	Basic insulation, according to IEC 61800-5-1, IEC62109-1CATIII, PD2

CR1V PB01 SERIES

Electrical data

CR1V 6 PB01

※ With $T_A = 25^\circ\text{C}$, $V_C = 5\text{V}$, $R_L = 10\text{k}\Omega$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal rms current	I_{PN}	At		± 6		
Maximum measured current	I_{PM}	At	-20		20	
Turns ratio	K_N	-	1-2-3: 1000			
Internal sampling resistance	R_{IM}	Ω		26		
Theoretical sensitivity	G_{th}	mV/A		104.17		@ $V_C=5\text{V}$
Load resistance	R_L	k Ω	10			
Current consumption	I_C	mA	$8 + I_P/N_S$			
Supply voltage	V_C	V	4.75	5	5.25	@ $\pm 5\%$
Output voltage	V_O	V	$2.5 \pm (0.625 * I_P / I_{PN})$			
Reference voltage @ $I_P=0\text{A}$	V_{REF}	V	2.495	2.5	2.505	
External reference voltage	V_{REF}	V	0.5		2.75	
Output voltage	V_{OUT}	V	0.25		4.75	@ $V_C=5\text{V}$
Output voltage @ $I_P=0\text{A}$	V_{OUT}	V		V_{REF}		
Offset voltage	V_{OE}	mV	-5		5	$V_{OUT} - V_{REF}$
Temperature drift of offset voltage	TCV_{OE}	ppm/K	-30		30	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$
Sensitivity error	ε_G	%	-0.5		0.5	Exclusive of V_{OE}
Temperature of G	TCG	ppm/K	-50		50	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$
Hysteresis offset voltage @ $I_P=0$ after $3X I_{PN}$	V_M	mV	-2	± 1	2	
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	Exclusive of V_{OE}
Accuracy @ I_{PN}	X	% of I_{PN}	-0.8		0.8	Exclusive of V_{OE}
Response time @ 90% of I_{PN}	t_r	μs			1	@ $di/dt=50\text{A/s}$
Frequency bandwidth (-1dB)	BW	kHz	200			

CR1V PB01 SERIES

Electrical data

CR1V 15 PB01

※ With $T_A = 25\text{ }^\circ\text{C}$, $V_C = 5\text{V}$, $R_L = 10\text{k}\Omega$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal rms current	I_{PN}	At		± 15		
Maximum measured current	I_{PM}	At	-51		51	
Turns ratio	K_N	-	1-2-3: 1000			
Internal sampling resistance	R_{IM}	Ω		15.6		
Theoretical sensitivity	G_{th}	mV/A		41.67		@ $V_C=5\text{V}$
Load resistance	R_L	k Ω	10			
Current consumption	I_C	mA	$8 + I_P/N_S$			
Supply voltage	V_C	V	4.75	5	5.25	@ $\pm 5\%$
Output voltage	V_O	V	$2.5 \pm (0.625 * I_P / I_{PN})$			
Reference voltage @ $I_P=0\text{A}$	V_{REF}	V	2.495	2.5	2.505	
External reference voltage	V_{REF}	V	0.5		2.75	
Output voltage	V_{OUT}	V	0.25		4.75	@ $V_C=5\text{V}$
Output voltage @ $I_P=0\text{A}$	V_{OUT}	V		V_{REF}		
Offset voltage	V_{OE}	mV	-5		5	$V_{OUT} - V_{REF}$
Temperature drift of offset voltage	TCV_{OE}	ppm/K	-30		30	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$
Sensitivity error	ε_G	%	-0.5		0.5	Exclusive of V_{OE}
Temperature of G	TCG	ppm/K	-50		50	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$
Hysteresis offset voltage @ $I_P=0$ after $3X I_{PN}$	V_M	mV	-2	± 1	2	
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	Exclusive of V_{OE}
Accuracy @ I_{PN}	X	% of I_{PN}	-0.8		0.8	Exclusive of V_{OE}
Response time @ 90% of I_{PN}	t_r	μs			1	@ $di/dt=50\text{A/s}$
Frequency bandwidth (-1dB)	BW	kHz	200			

CR1V PB01 SERIES

Electrical data


CR1V 25 PB01

※ With $T_A = 25\text{ }^\circ\text{C}$, $V_C = 5\text{V}$, $R_L = 10\text{k}\Omega$, unless otherwise noted.

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Primary nominal rms current	I_{PN}	At		± 25		
Maximum measured current	I_{PM}	At	-85		85	
Turns ratio	K_N	-	1-2-3: 1000			
Internal sampling resistance	R_{IM}	Ω		10.4		
Theoretical sensitivity	G_{th}	mV/A		25		@ $V_C=5\text{V}$
Load resistance	R_L	k Ω	10			
Current consumption	I_C	mA	$8 + I_P/N_S$			
Supply voltage	V_C	V	4.75	5	5.25	@ $\pm 5\%$
Output voltage	V_O	V	$2.5 \pm (0.625 * I_P / I_{PN})$			
Reference voltage @ $I_P=0\text{A}$	V_{REF}	V	2.495	2.5	2.505	
External reference voltage	V_{REF}	V	0.5		2.75	
Output voltage	V_{OUT}	V	0.25		4.75	@ $V_C=5\text{V}$
Output voltage @ $I_P=0\text{A}$	V_{OUT}	V		V_{REF}		
Offset voltage	V_{OE}	mV	-5		5	@ $V_{OUT}-V_{REF}$
Temperature drift of offset voltage	TCV_{OE}	ppm/K	-30		30	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$
Sensitivity error	ε_G	%	-0.5		0.5	Exclusive of V_{OE}
Temperature of G	TCG	ppm/K	-50		50	@ $-40^\circ\text{C} \sim 105^\circ\text{C}$
Hysteresis offset voltage @ $I_P=0$ after $3X I_{PN}$	V_M	mV	-2	± 1	2	
Linearity error	ε_L	% of I_{PN}	-0.1		0.1	Exclusive of V_{OE}
Accuracy @ I_{PN}	X	% of I_{PN}	-0.8		0.8	Exclusive of V_{OE}
Response time @ 90% of I_{PN}	t_r	μs			1	@ $di/dt=50\text{A/s}$
Frequency bandwidth (-1dB)	BW	kHz	200			

CR1V PB01 SERIES

Dimensions (in mm. 1 mm = 0.0394 inch)

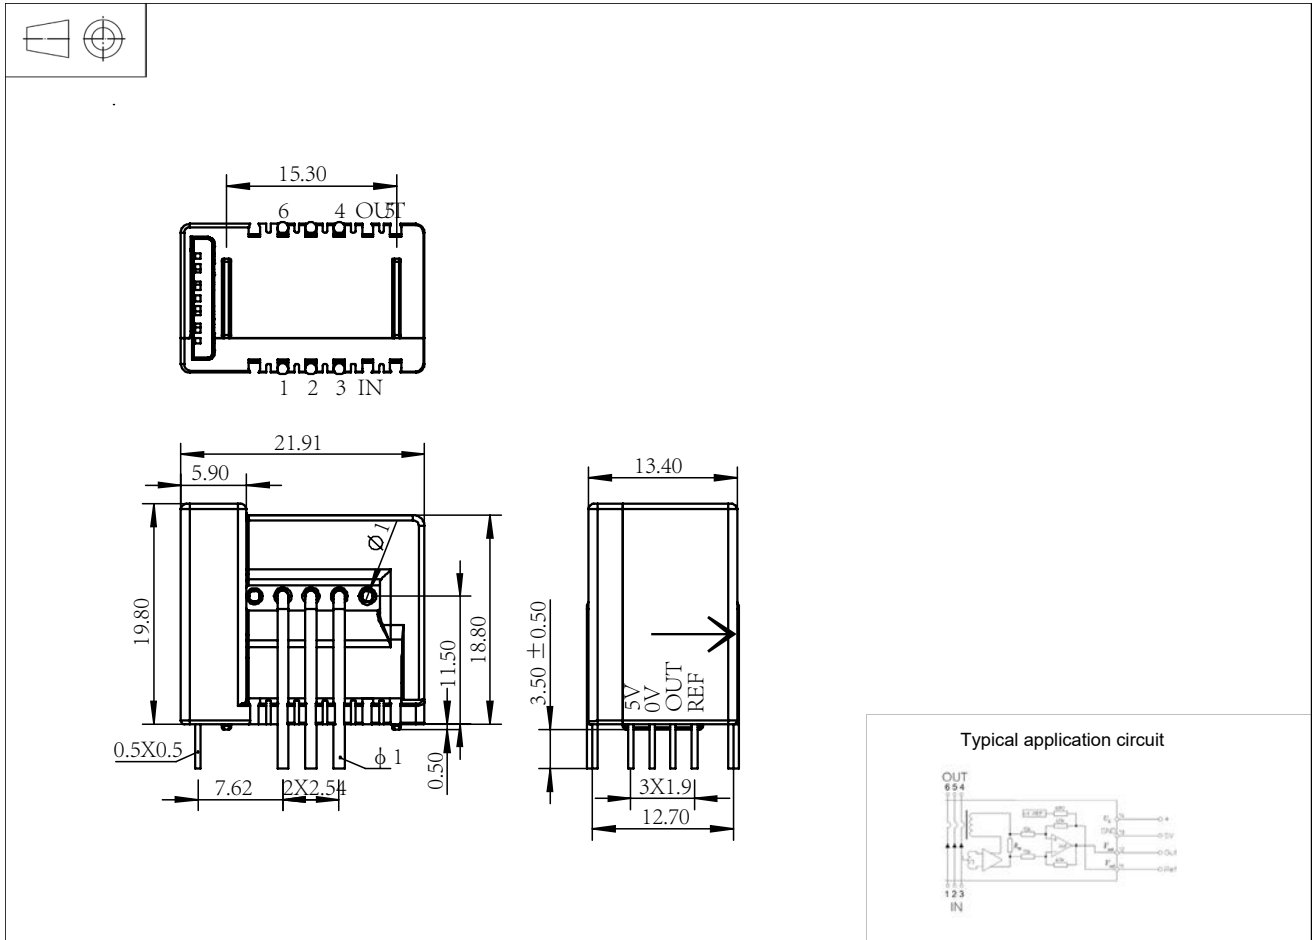

Number of Primary turns	Primary nominal current I_{PN} (A)	Nominal output voltage V_o (V)	Primary resistance R_p (m Ω)	Primary inductance L_p (μ H)	Recommended connections
1	± 6 (± 15 , ± 25)	2.5 ± 0.625	0.18	0.013	
2	± 3 (± 7.5 , ± 12.5)	2.5 ± 0.625	0.81	0.05	
3	± 2 (± 5 , ± 8.3)	2.5 ± 0.625	1.62	0.12	

Mechanical characteristics

- ◇ General tolerance ± 0.3 mm
- ◇ Connect the original side to the pin 6 pins $\phi 1$ mm
- ◇ The secondary side signal connects to the pin 4 pins 0.5×0.5 mm

Remarks

- ◇ I_s is positive when the measured electric current flows from 1,2,3 to 4,5,6.
- ◇ This is a standard model. For different applications (measurement, secondary connections...), please contact CHIPSENSE.