


CM4A H05 SERIES

Current Sensor

Model Number:

CM4A 1000 H05

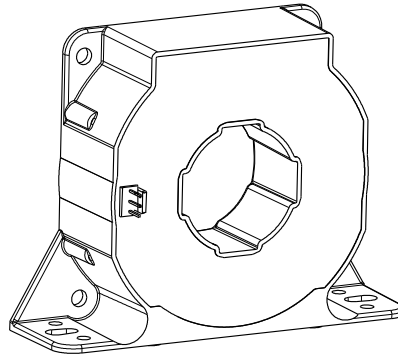

For the electronic measurement of current: DC, AC, pulsed..., with galvanic separation between the primary and the secondary circuit.

Features

- ✧ Closed loop (compensated) current sensor using the Hall effect
- ✧ Galvanic separation between primary and secondary
- ✧ Insulating plastic case recognized according to UL 94-V0
- ✧ Very good linearity
- ✧ High accuracy
- ✧ Very low offset drift over temperature
- ✧ No insertion loss
- ✧ Standards:
 - EN50178: 1997
 - IEC 61010-1: 2000
 - UL 508: 2010

Applications

- ✧ AC variable speed and servo motor drives
- ✧ Uninterruptible Power Supplies (UPS)
- ✧ Static converters for DC motor drives
- ✧ Switch Mode Power Supplies (SMPS)
- ✧ Power supplies for welding applications
- ✧ Battery management
- ✧ Wind energy inverter
- ✧ Test and detection devices

Safety

This sensor must be used according to IEC61010-1.

This sensor must be used in electric/electronic equipment with respect to applicable standards and safety requirements in accordance with the manufacturer's operating instructions.

Caution, risk of electrical shock!



When operating the sensor, certain parts of the module can carry hazardous voltage (e.g., Primary busbar, power supply). Ignore this warning can lead to injury and/or cause serious damage.

This sensor is a built-in device, whose conducting parts must be inaccessible after installation. A protective housing or additional shield could be used.

Main supply must be able to be disconnected.

CM4A H05 SERIES

Absolute maximum ratings(not operating)

Parameter	Symbol	Unit	Value
Supply voltage	V_C	V	± 25.2
Primary conductor temperature	T_B	°C	100
ESD rating, Human Body Model (HBM)	V_{ESD}	kV	4

- ※ Stresses above these ratings may cause permanent damage.
- ※ Exposure to absolute maximum ratings for extended periods may degrade reliability.

Environmental and mechanical characteristic

Parameter	Symbol	Unit	Min	Typ	Max	Comment
Ambient operating temperature	T_A	°C	-40		85	
Ambient storage temperature	T_S	°C	-40		90	
Mass	m	g		615		
Standards	EN 50178, IEC 61010-1, UL 508C					

Insulation coordination

Parameter	Symbol	Unit	Value	Comment
Rms voltage for AC insulation test, 50 Hz, 1 min	V_d	kV	3.8	
Impulse withstand voltage 1.2/50µs	V_w	kV	16	
Clearance (pri.- sec.)	d_{c1}	mm	19.6	
Creepage distance (pri.- sec.)	d_{cP}	mm	20.6	
Plastic case	-	-	UL94-V0	
Comparative tracking index	CTI	PLC	3	
Application example	-	-	1000V CAT III PD2	Reinforced insulation, according to EN 50178, EN 61010-1
Application example	-	-	2000V CAT III PD2	Basic insulation, according to EN 50178, EN 61010-1

CM4A H05 SERIES


Electrical data

※ With $T_A = 25^\circ\text{C}$, $V_C = \pm 24\text{V}$, $R_M = 24\Omega$, unless otherwise noted.

Parameter	Symb	Unit	Min	Typ	Max	Comment
Primary nominal rms current	I_{PN}	A	-1000		1000	
Primary current, measuring range	I_{PM}	A	-2100		2100	
Measuring resistance	R_M	Ω	0		16	@ $\pm 15\text{V}$, 85°C , $\pm 1000\text{A}$
			0		4	@ $\pm 15\text{V}$, 85°C , $\pm 1200\text{A}$
			10		54	@ $\pm 24\text{V}$, 85°C , $\pm 1000\text{A}$
			10		1	@ $\pm 24\text{V}$, 85°C , $\pm 2100\text{A}$
Secondary nominal rms current	I_{SN}	mA	-200		200	
Secondary coil resistance	R_S	Ω			39	@ 25°C
					51	@ 85°C
Secondary current, measuring range	I_S	mA	-420		420	@ $\pm 24\text{V}$
Number of secondary turns	N_S	-		5000		
Theoretical sensitivity	G_{th}	mA/A		0.2		
Supply voltage	V_C	V	± 15		± 24	@ $\pm 5\%$
Current consumption	I_C	mA		$28 + I_S$		
Offset current	I_0	mA	-0.2		0.2	
Thermal drift of offset current	I_{0T}	mA	-0.6		0.6	@ $-40^\circ\text{C} \sim 85^\circ\text{C}$
Residual current@ $I_P=0$ after I_{PN}	I_{0M}	mA	-0.1		0.1	
Sensitivity error	ε_G	%	-0.2		0.2	Exclusive of I_{0E}
Linearity error 0... I_{PN}	ε_L	% of I_{PN}	-0.1		0.1	Exclusive of I_{0E}
Accuracy@ I_{PN}	X	% of I_{PN}	-0.3		0.3	Exclusive of I_{0E}
Response time@ 90% of I_{PN}	t_r	μs		0.5	1	
Frequency bandwidth(-3dB)	BW	kHz	150			

CM4A H05 SERIES

Dimensions (in mm. 1 mm = 0.0394 inch)

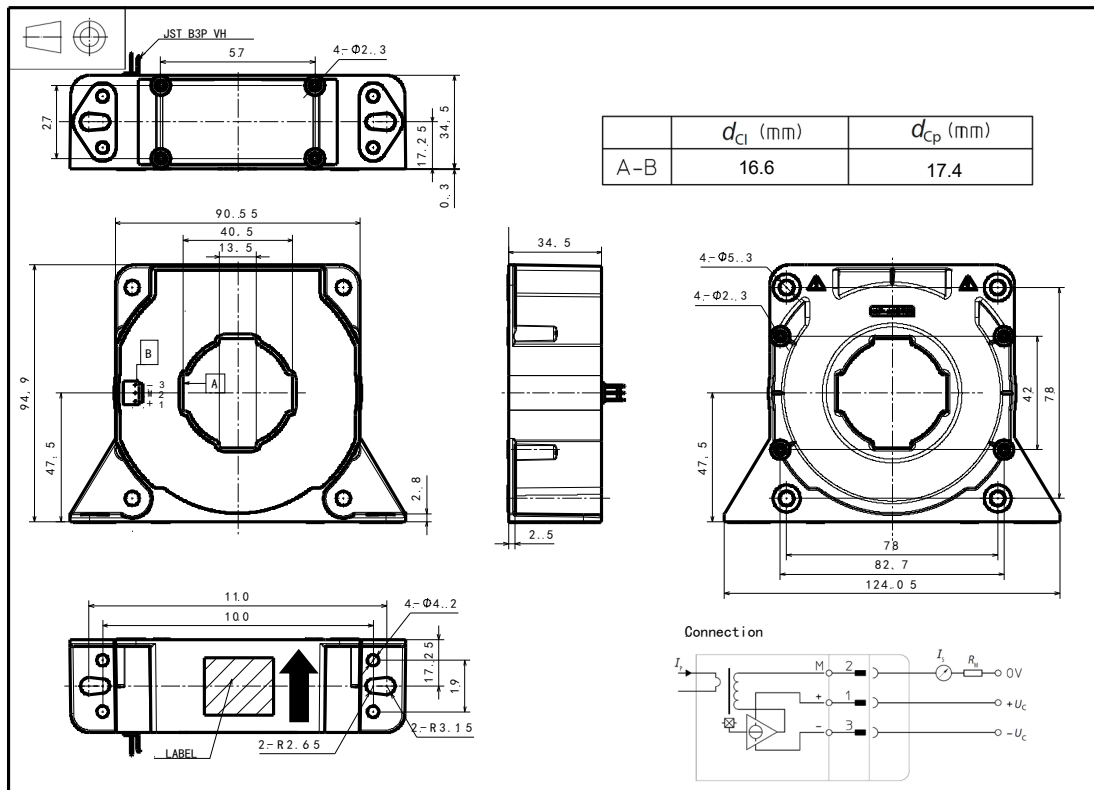

Mechanical characteristics

- ◇ General tolerance $\pm 0.5\text{mm}$
- ◇ Primary hole $\Phi 38\text{mm}$
40mmx13mm
or
- ◇ Transduce vertical fastening
2pc $\Phi 5.3\text{mm}$ through hole
2pc M5 metal screw
- Recommended fastening torque 1.2 N•m ($\pm 10\%$)
or
4pc $\Phi 4.2\text{mm}$ through hole
4pc M4 metal screw
- Recommended fastening torque 0.9 N•m ($\pm 10\%$)
- ◇ Connection of secondary JST B3P VH
- ◇ Transduce horizontal fastening
4pc $\Phi 5.3\text{mm}$ through hole
4pc M5 metal screw
- Recommended fastening torque 1.2 N•m ($\pm 10\%$)

Remarks

- ◇ I_S and I_P are in the same direction, when I_P flows in the direction of arrow.
- ◇ Temperature of primary conductor should not exceed 100°C .
- ◇ Dynamic performances (di/dt and response time) are best with a single bar completely filling the primary hole.

This is a standard model. For different applications(measurement, secondary connections...), please contact CHIPSENSE.